

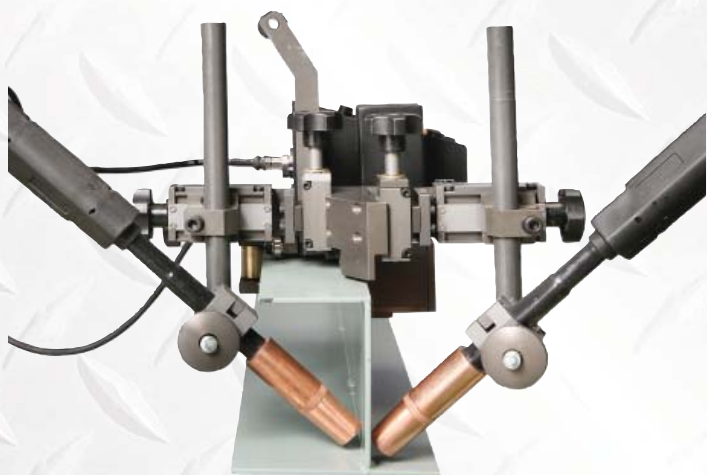


## ANGLE-BAR DUAL SIDE FILLET CARRIAGE



- Angle-Bar welder both stitch and continuous welds by 2-torch offers the highest work efficiency.
- Minimized gear backlash offers various constant speed/adjustable controls. The special motor with a reducer produces highest quality welding and long life.
- Limit switches will stop carriage travel.
- Crate fill at the beginning and end of welding.
- Stitch, continuous welds and the travel speed in cm/min or inch/min programmable in acc with the user manual.
- Torches accept both straight and bent.



Configuration	Specification	Remarks
Model	CS-241	Carriage
Input Power	AC 110V - 230V, 50/60Hz	-
Dimension	356 (W) x 354 (L) x 278 (H)	-
Weight	6.6 kg	-
Driving Method	2WHEELS-DRIVEN	-
Travelling Speed	0 ~ 98 cm/min	-
Travelling Motor	DC24V, 12W, 5000RPM	BLDC Motor
Traction Power	23 kg	-
Up / Down Angle	35° ~ 55°	-
Front / Back Distance	0 ~ 50 mm	-
Up / Down Distance	0 ~ 25 mm	-
Running Angle	±3°	-